

Sub265_vKi-S


High-End Subwoofer



Sub265_vKi-S is top of the art high-end subwoofer, engineered to reproduce 25Hz to 500Hz in sealed enclosure.

- Very low dynamic compression (0.5dB max, below 100Hz, with 105dB at 1m).
- Very low Inter Modulation Distortion.
- Very low Total Harmonic Distortion, especially in low frequency (below 1.5% with 95dB output).
- +/- 16mm pure linear excursion.
- Engineered and produced in France

Frequency response and Impedance

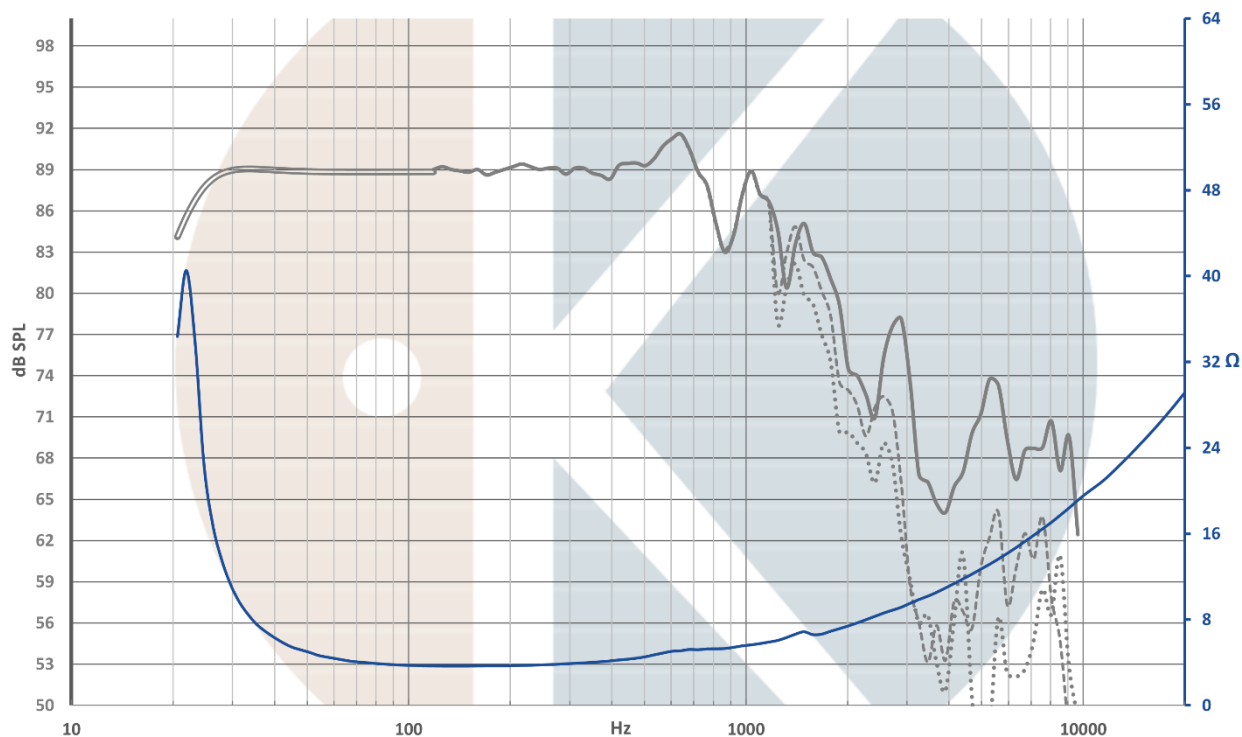

On IEC baffle / Distance: 1m / Signal input: 2,83V / Dash curves: 25° & 50° / Smoothing: 1/12 Octave

Impedance measured in free air

Curve below 120Hz simulated in 40L sealed enclosure / EQ +8dB at 25Hz - Q2.2 & -2dB at 65Hz - Q1

Datasheet for	Sub265_vKi-S	Notes	Kartesian products can be adapted to specific requirements and brand spirit. Each _vKi drivers is delivered with its QC report. We continually improve our products, no contractual data.	
Edition	1.6			
www.kartesian-acoustic.com				

Detailed construction

Membrane

4 layers - vented paper cone
Large concave CGF dust cap

Suspension

Tri-radius roll surround
Surround with radial reinforcements
Low lost NBR surround material
Dual spiders, vented spacers
progressive + pumaX spiders

Voice coil:

Ø78.5mm, 1 layer, Cu ribbon wire
Vented Titanium / GF former

Motor structure:

8x radial NdFeB magnets (grade N40H)
8x Cooper struts
2x Aluminium rings
Optimized and vented pole pieces
Low carbon steel

Frame

Injected aluminium (ACD12)
Vented spider

Driver weight: 4.92Kgs

T&S parameters

Parameter	Unit	Value	Tolerance
F_s	Hz	22Hz	+/-3
SPL	dB/2.83V/1m	89	+/-0.5
BI	N/A	9.08	+/-0.1
M_{ms}	g	86	+/-2
R_{ms}	Kg/s	1.56	
Le (at 1kHz)	mH	0.32	+/-0.08
Re	Ω	3.4	+/-0.15
Impedance	Ω	4	
Q_{ms}		7.6	
Q_{es}		0.49	
Q_{ts}		0.46	
VAS	L	103.4	
S_d	cm ²	346	
M_{md} / S_d	g/cm ²	0.216	
BI / Re	T.m/Ω	2.67	

Linear excursion: +/-16 mm

BI(x) deviation max: 12%

Maximal excursion: +/-18mm


BI(x) deviation max: 20%

Maximal power handling: 500W

(AES:2012 standard)

Drawing

Unit: mm

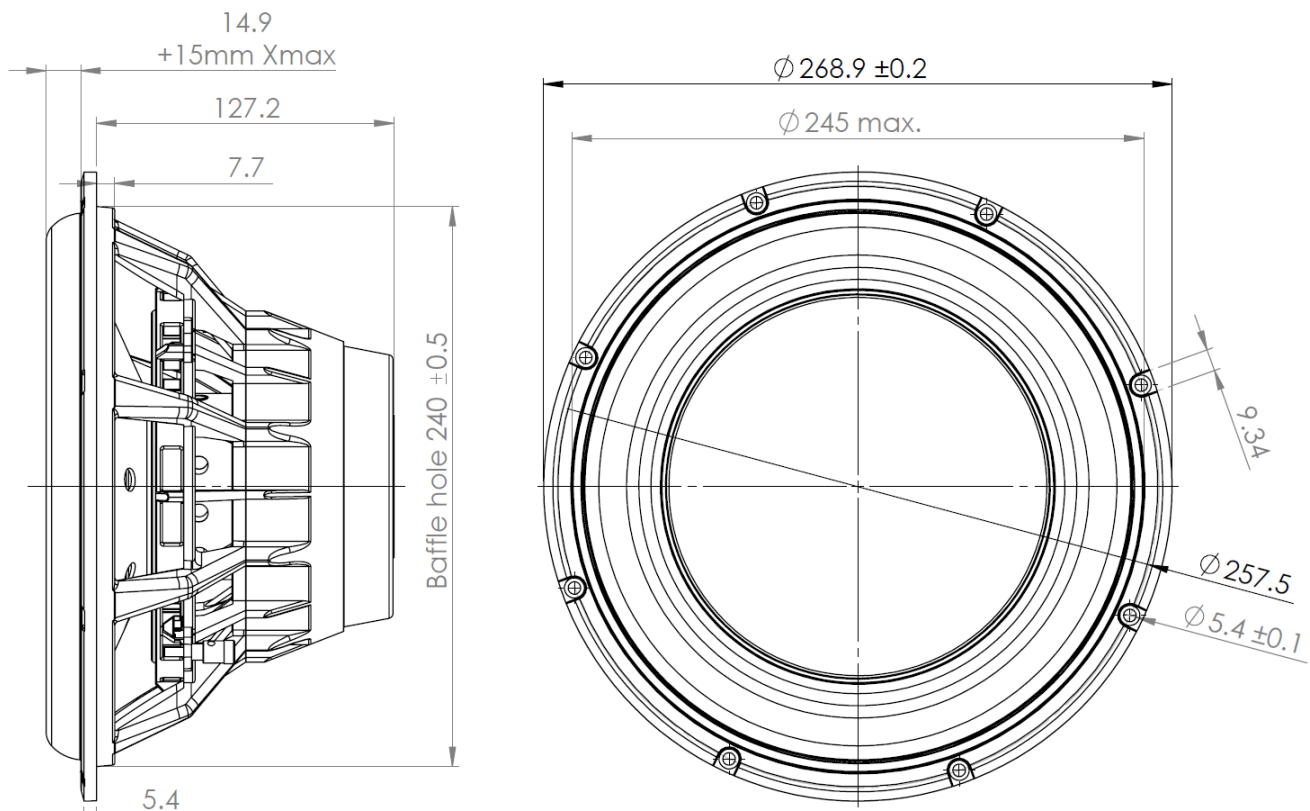


Datasheet for		Sub265_vKi-S		Notes	Kartesian products can be adapted to specific requirements and brand spirit. Each _vKi drivers is delivered with its QC report. We continually improve our products, no contractual data.	
Edition		1.6				
www.kartesian-acoustic.com						

Advanced measurements (1/2)

Fundamental + H2 & H3

Sub265_vKi-S

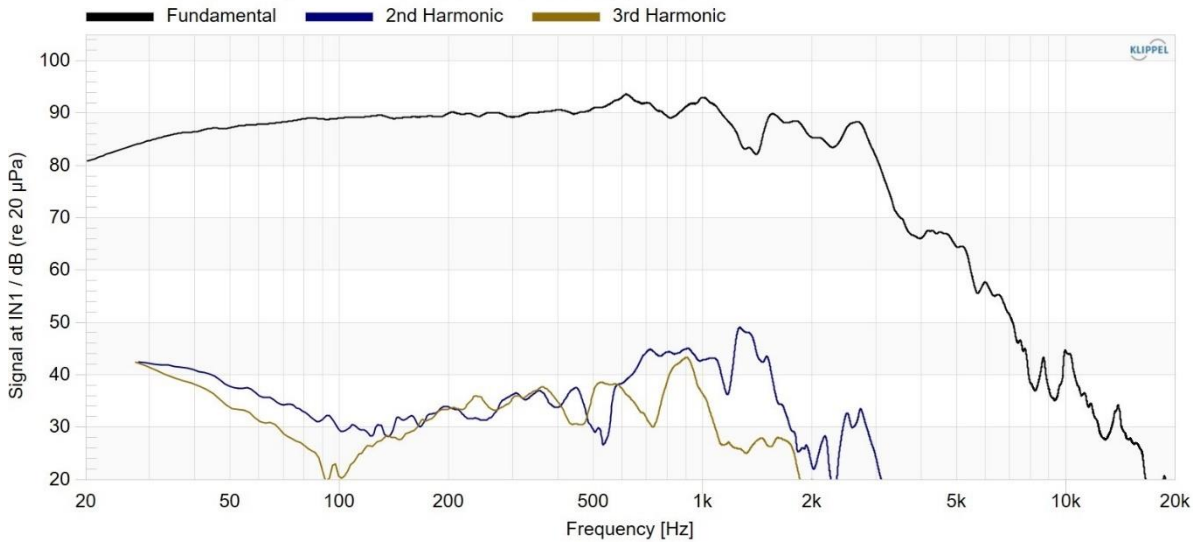


H2 – H3 for 2.83V

Very low THD in low frequency (advised up-to 500Hz).


Relative H2 - H3 at 95dB/1m

Sub265_vKi-S

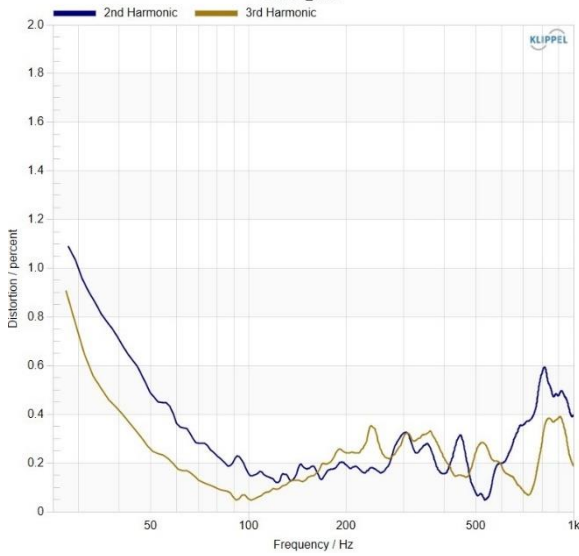

Multi-tone Distortion

Sub265_vKi-S

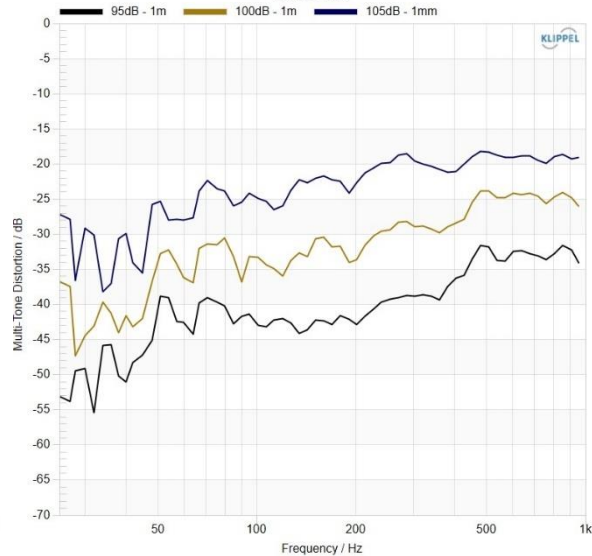


Distortion details

THD is lower than 1% at 40Hz when Sub265_vKi-S is playing 95dB at 1m.

Very low MD in low frequency, even at 105dB at 1m.


Bl(x) Force Factor

Sub265_vKi-S

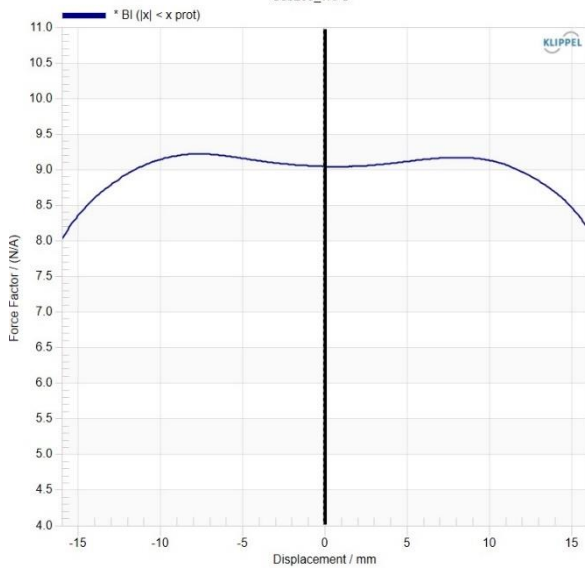

Kms(x) Stiffness of Suspension

Sub265_vKi-S

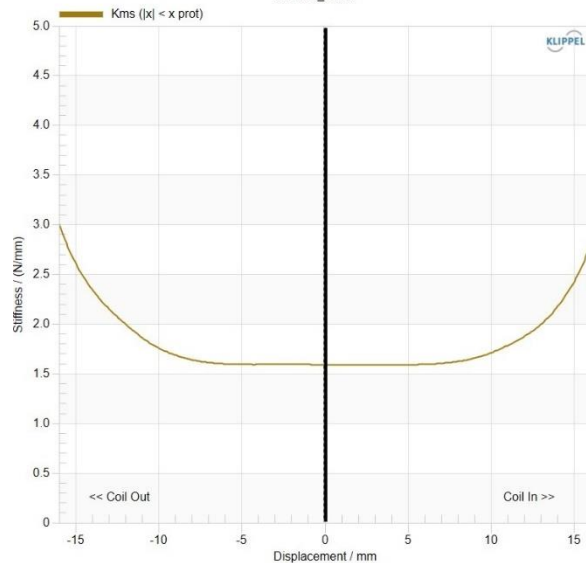

Linear excursion

+/-16mm linear motion with Bl(x) curve shape suitable to Kms(x)


Force factor remains stable with 90% accuracy on the full excursion.

Suspension stiffness increase smoothly to ensure soft Fs variation


Datasheet for	Sub265_vKi-S	Notes	Kartesian products can be adapted to specific requirements and brand spirit. Each _vKi drivers is delivered with its QC report. We continually improve our products, no contractual data.	
Edition	1.6			
www.kartesian-acoustic.com				

Advanced measurements (2/2)

Step Response
Sub265_vKi-S

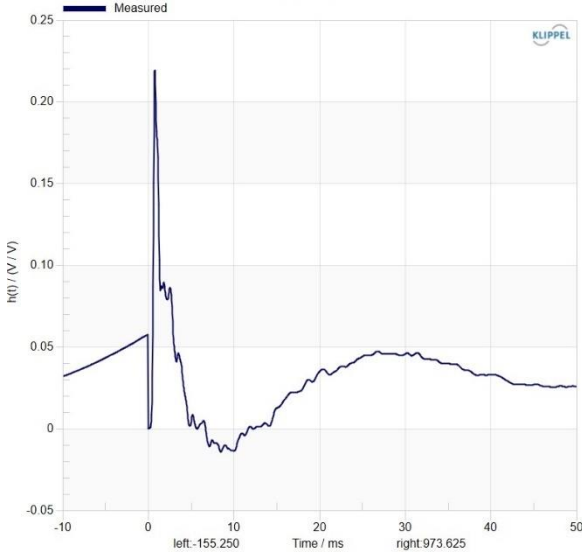

Compression of Transfer Function H(f)
Sub265_vKi-S

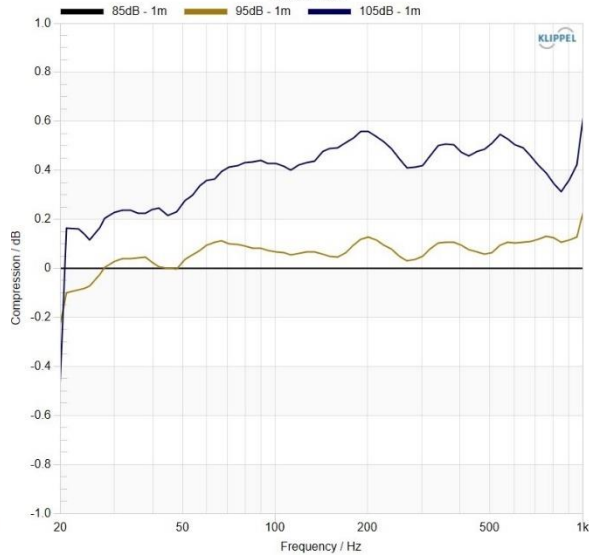


Dynamic behavior


Step response shows fast transient and good damping.

Dynamic compression is 0.5dB max below 100Hz when Sub265_vKi-S is playing 105dB at 1m.

L(x,i=0) Electrical Inductance
Sub265_vKi-S

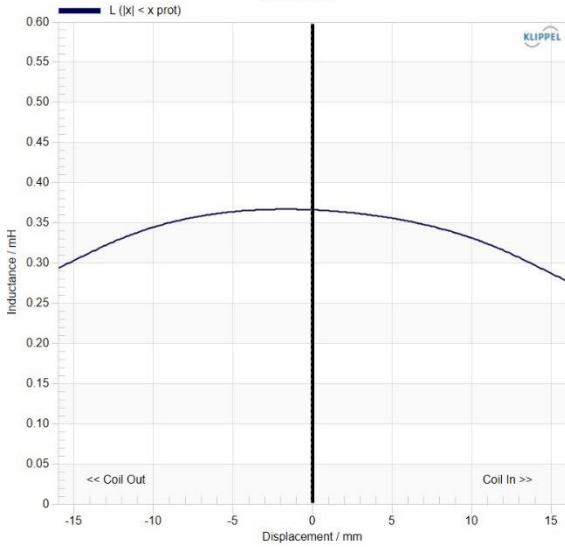

L(x=0,i) Electrical Inductance
Sub265_vKi-S

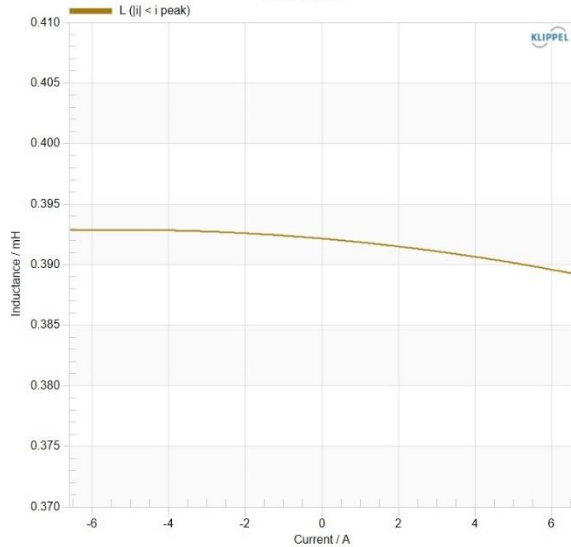


Inductance


Le = 0.32mH at 1kHz. Average 0.37mH at the rest position, on the band 20 – 2000Hz. Inductance variation over +/-17mm is 0.07mH.

Inductance variation according to current input is 0.05mH max with +/-6.5A consumed.

Qts(x) Total Loss Factor
Sub265_vKi-S

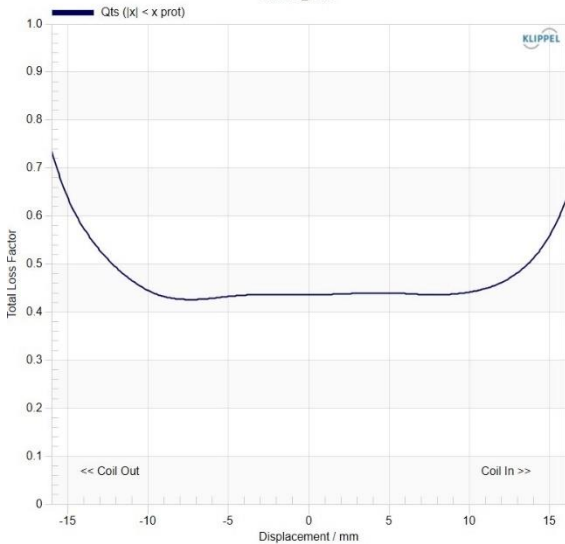

Voice Coil Displacement
Sub265_vKi-S

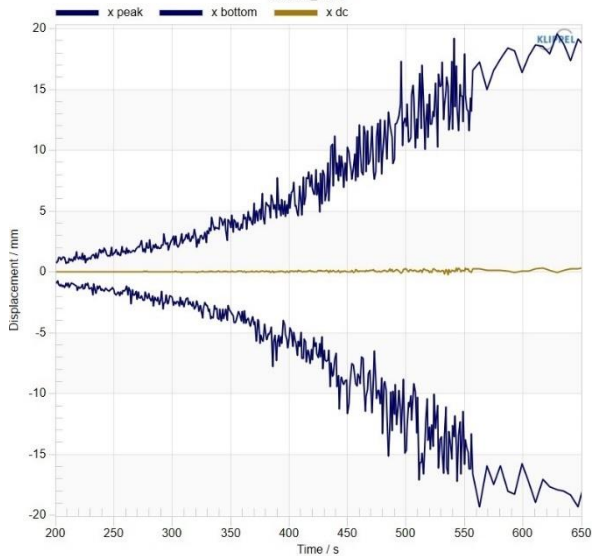

Stability

Qts variation is symmetric and limited to 30% over +/-14mm excursion.

There isn't any significant offset over +/-20mm excursion

Datasheet for	Sub265_vKi-S	Notes	Kartesian products can be adapted to specific requirements and brand spirit. Each _vKi drivers is delivered with its QC report. We continually improve our products, no contractual data.	
Edition	1.6			
www.kartesian-acoustic.com				